

LIGHT KIT WILL FIT CLUB CAR® DS® INSTALLATION INSTRUCTIONS

INCLUDED:

- 2 HEADLIGHTS
- 2 TAIL LIGHTS
- 1 WIRING HARNESS
- 1 ROCKER SWITCH
 MOUNTING SCREWS



Cut out template and place it against cart using the body lines for alignment.





Draw the inside of the template out with a writing utensil. Next drill a pilot hole so you will have a starting point to begin cutting.





Using the template you drew on the cart, use a rotary tool to cut out the light area of the cowl starting at the pilot hole from step 2.



Place headlight into the front of the vehicle. Insert four screws into headlight using supplied hardware.

*Repeat process on opposite side



Place tail light template against cart. Using a writing utensil, draw the template onto the cart.



Drill a pilot hole and cut out the shape of the tail light.






Insert tail light and attach tail light to cart using provided hardware.



Run wiring harness down the side of the frame of the cart as shown. Feed wiring harness through battery compartment to front of cart.



Run wiring harness beside the frame so it doesn't hang. Secure it with wire ties to keep it in place while you are riding.



Using a 15/32" drill bit, drill out the hole for the rocker switch. Drill Gently. Remove key switch cover.



Feed threaded end of switch through the dash where the hole was drilled. Tighten and attach harness as shown.

Supply - 12v(+) switched (Red) Load - 12v(+) constant (Blue)



Re attach dashboard as shown.




Plug headlights and tail lights into harness as shown.



Secure remaining harness under cowl using provided ties.



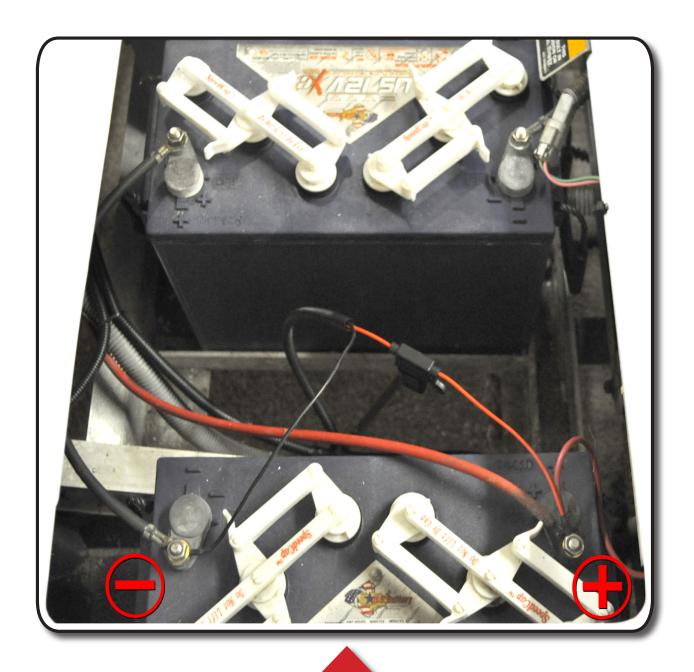

If you have 12 volt batteries wire the harness to the battery as shown. If you have 8 Volt batteries a 16/12 voltage reducer will be necessary.

CAUTION: THIS LIGHT KIT IS A 12V SYSTEM. SUPPLYING MORE THAN 12V TO THE SYSTEM WILL DAMAGE THE LIGHT KIT AND VOID YOUR WARRANTY. DO NOT OVERLOAD.

We recommend professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your cart's body.

INSTALLATION COMPLETE

E-Z-G0® TXT®, and E-Z-G0® RXV® are registered trademarks of Textron Innovations, Inc. Club Car® Precedent®, and Club Car® DS® are registered trademarks of Ingersoll Rand, Inc. Yamaha®, Yamaha® Drive®, G-14®, G-16®, G-19®, and G-22® are registered trademarks of Yamaha Golf-Car Company. Any reference to Club Car®, E-Z-Go®, or Yamaha® or their associated trademarks, word marks, and products are only for purposes of identifying golf carts with which this GTW product is compatible. GTW products are aftermarket parts and are not original equipment parts. GTW is not connected to, affiliated with, sponsored by, or endorsed by either Textron Innovations, Inc., Ingersoll Rand, Inc., Yamaha Golf Cart Company, or any of their parent or subsidiary companies.